


**Alcoa
Fastening
Systems**



HuckLok[®] Blind Rivets

**Double-Locking, Wide-Grip
Fasteners for Metals, Plastics,
and Composites.**

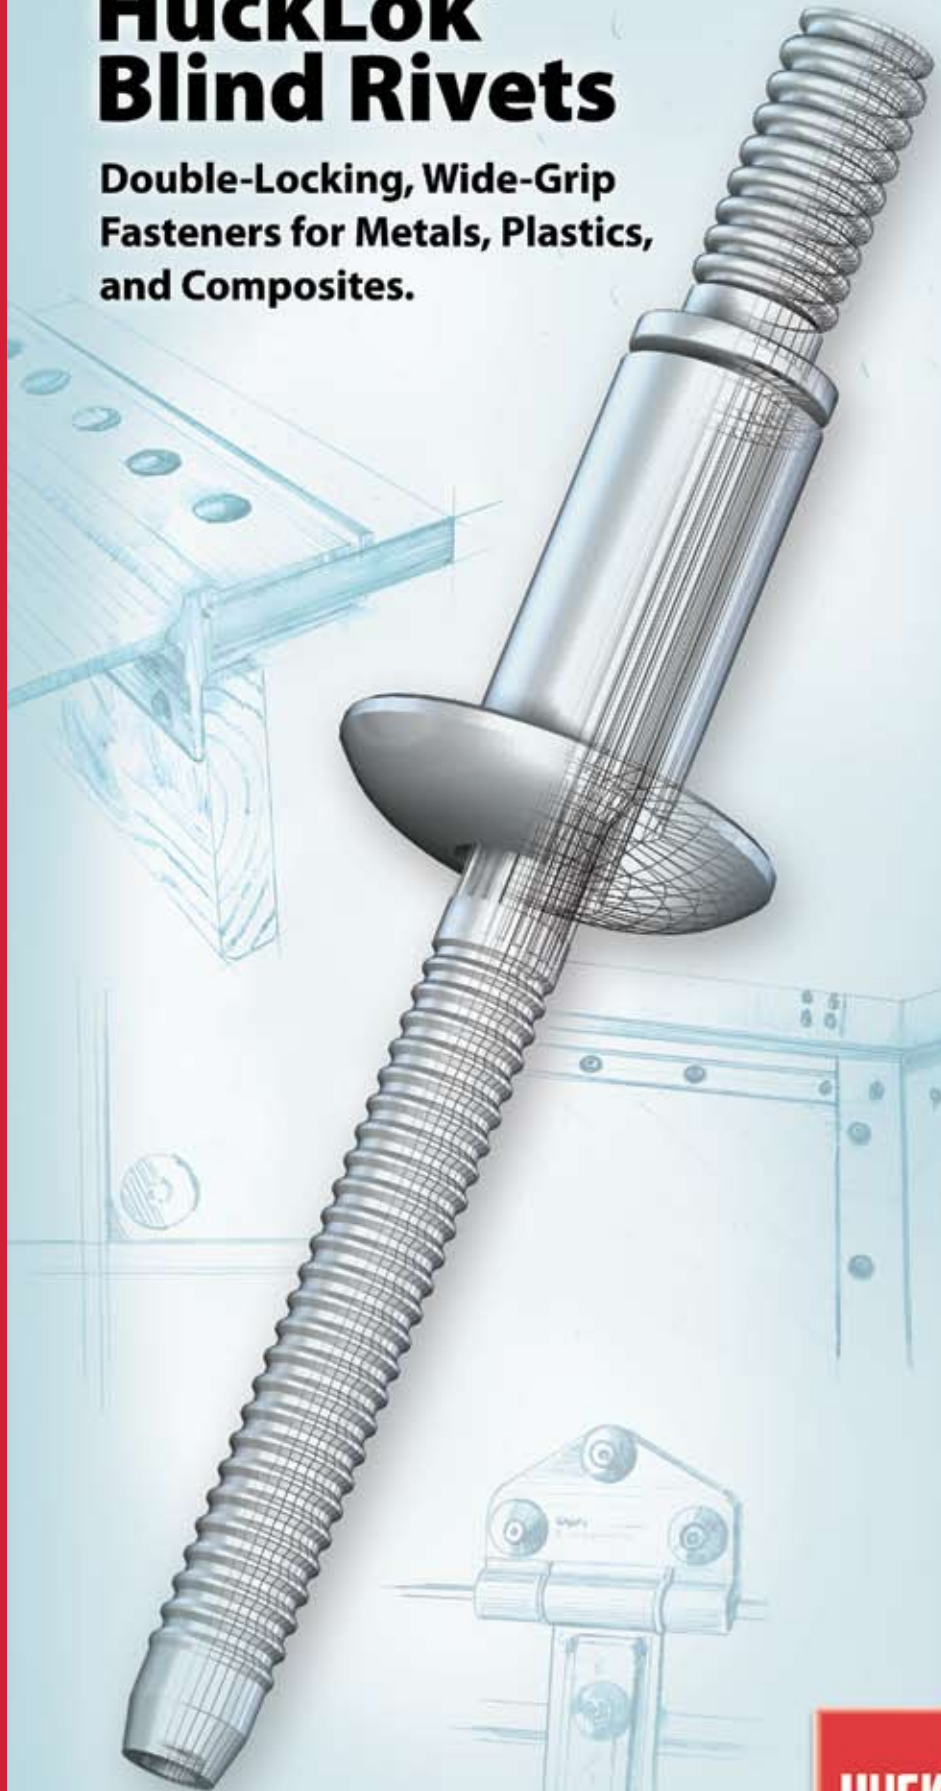

Wide Grip Range and Large Footprint

A generous, quarter-inch grip range lets the new HuckLok blind rivet join assemblies that are 1/8 to 7/8 inch thick. HuckLok's large footprint, or "bulb," spreads the load over a broad area, for a durable, dependable connection with all types of metals, plastics, and composites.

Unique Double-Lock Design

As shown in the illustrated installation sequence, the HuckLok's double locking system actually locks the assembly from both sides, for incomparable performance and reliability. "Breakaway" ring design lets the shear ring settle into the appropriate catch groove, ensuring a consistent clamp throughout the HuckLok's wide grip range.

Fast, Foolproof Installations

With HuckLok blind rivets, quality installations do not depend upon the skill of the worker or the correct insert in the tool. They install in seconds, cleanly and precisely, and require no more than a glance to confirm an accurate set. If the core pin is flush the HuckLok has been properly installed.

Dimensional Data


Dia. (No.)	Part No.	Grip Range	Hole Size	A	B	C	F	G
3/16 (6)	HKLP-R6-5	.062-.312	.191-.201	.120 MAX	.348-.388	.101 MAX	.900	183-.190
Protruding Head	HKLP-R6-7	.187-.437	.191-.201	.120 MAX	.348-.388	.101 MAX	1.025	183-.190
1/4 (8)	HKLP-R8-6	.080-.375	.261-.272	.162 MAX	.490-.530	.110-.125	1.062	251-.260
Protruding Head	HKLP-R8-7	.187-.437	.261-.272	.162 MAX	.490-.530	.110-.125	1.124	251-.260
	HKLP-R8-10	.375-.625	.261-.272	.162 MAX	.490-.530	.110-.125	1.312	251-.260
	HKLP-R8-12	.500-.750	.261-.272	.162 MAX	.490-.530	.110-.125	1.436	251-.260
	HKLP-R8-14	.625-.875	.261-.272	.162 MAX	.490-.530	.110-.125	1.562	251-.260
1/4 (8)	HKLT-R8-6	.080-.375	.261-.272	.162 MAX	.532-.592	.110-.125	1.062	251-.260
Truss Head	HKLT-R8-7	.187-.437	.261-.272	.162 MAX	.532-.592	.110-.125	1.124	251-.260
	HKLT-R8-10	.375-.625	.261-.272	.162 MAX	.532-.592	.110-.125	1.312	251-.260
	HKLT-R8-12	.500-.750	.261-.272	.162 MAX	.532-.592	.110-.125	1.436	251-.260
	HKLT-R8-14	.625-.875	.261-.272	.162 MAX	.532-.592	.110-.125	1.562	.251-.260

Installed Values (Minimum)

	3/16	1/4
Shear	1900	3500
Tensile	1000	1900
Pin Retention	150	400
Installed Pin Position	±.030	±.030

Material and Finish

Material	Sleeve	Pin	Sleeve Finish	Pin Finish
Steel	Steel	Steel	Zinc Plate with Clear Chromate	Zinc Plate with Clear Chromate

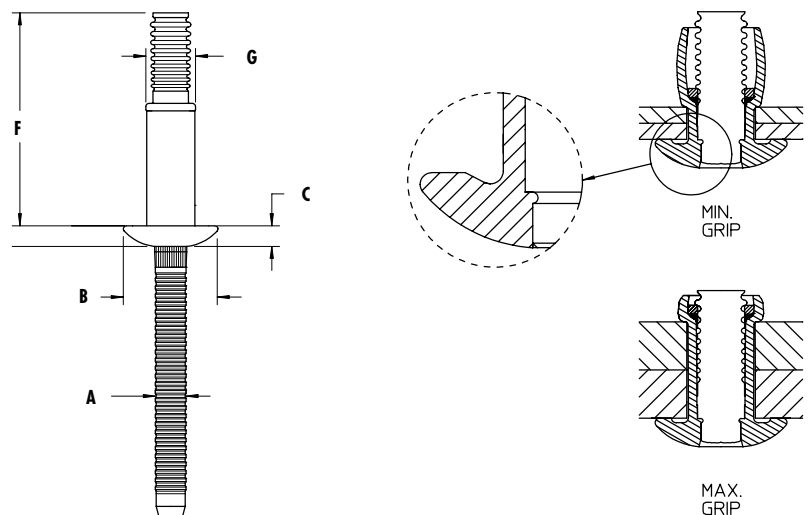

Breaking flush throughout its grip range, the HuckLok blind rivet lets the worker verify installation accuracy at a glance and eliminates costly cosmetic finishing

The HuckLok's wide footprint provides a broad blind-side bearing surface that resists pull-through


Undercut fillet allows seating in burred holes

Solid pin provides exceptionally high strength in the shear plane

Lock groove on pin engages shoulder on rivet head, while the extruded support ring "double locks" the pin within the bulb



Installation Sequence

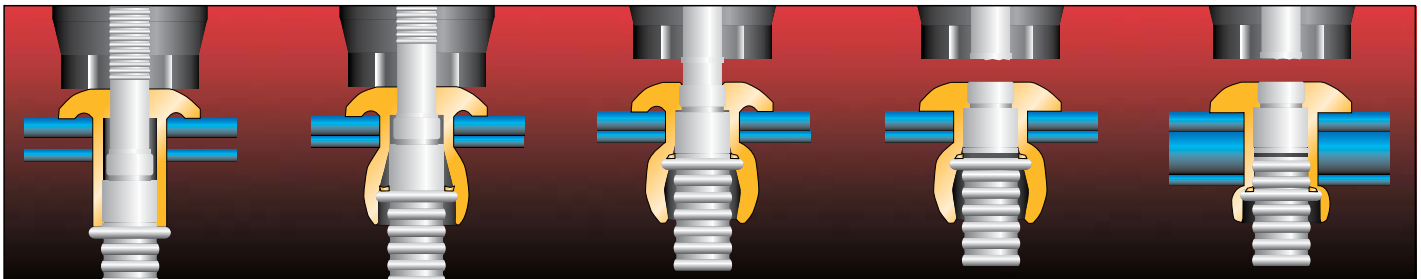

1 Insert the HuckLok fastener into the hole and slip the installation tool over the pintail.

2 Press the trigger to initiate pulling action. As the tool pulls on the pintail, the shear ring pushes the rivet sleeve outward, forming a bulb that compresses against and tightens the application.

3 During bulb formation, the shear ring forms a support ring from the rivet sleeve by creating a build-up of material above the ring.

4a (Min Grip) The shear ring breaks free and is pressed onto the catch grooves. The pulling action continues until the internal rivet shoulder engages the lock groove on the pin and forms an internal lock. The pintail then breaks off, completing the installation.

4b (Max Grip) Shown in maximum grip, the shear ring breaks free and settles into a catch groove upon completion of the pulling sequence. Double locking occurs as the sleeve "back fills" behind the shear ring while it travels through the sleeve.

Huck® Installation Tools & Nose Assemblies for HuckLok Fasteners

Tool Model		Air Tools				Hydraulic Tools			
		202/2022	2025 ⁴	202L/2022L/2025L ⁴	245/255	2480	2480L	2480XL	2480L-2
Nose Assembly	3/16"	99-3300 ^{1,2}	99-3300 ^{1,2}	99-3303L	99-3327	99-3300 ^{1,2}	99-3303L	99-3304XL	99-3303-2 ²
		99-3303	99-3303	99-3304L		99-3303	99-3304L		
		99-3304 ²	99-3304 ²	99-3487L ^{1,3}		99-3304 ²	99-3487L ^{1,3}		
		99-3487 ^{1,3}	99-3487 ^{1,3}			99-3487 ^{1,3}			
	1/4"	99-3301 ^{1,2}	99-3301 ^{1,2}	99-3305L	99-3328	99-3301 ^{1,2}	99-3305L	99-3306XL	99-3305-2 ²
		99-3305 ²	99-3305 ²	99-3306L		99-3305 ²	99-3306L		
		99-3306 ²	99-3306 ²	99-3487L ^{1,3}		99-3306 ²	99-3487L ^{1,3}		
		99-3487 ^{1,3}	99-3487 ^{1,3}			99-3487 ^{1,3}			

¹ Not recommended for large production runs.

² Can be used with 245/246, 255/256, 2502/2503 with adapter 102463.

³ Covers -.06 and -.08 diameters.

⁴ Longer grip applications may take two strokes to install.

Alcoa Fastening Systems



For more than 120 years, the name Alcoa has been recognized worldwide as a strong leader in product quality and customer support. These strengths are found in every product manufactured for Alcoa Fastening Systems, offering the greatest breadth and depth of fastening system solutions in the industry.

Alcoa Fastening Systems (AFS) maintains company offices in the United States and in many other countries. AFS fastener distributors are also located in many of the world's industrial centers, where they provide a ready source of AFS fasteners, installation tools, tool parts, and application assistance.

Americas

Industrial Fastener Division
8001 Imperial Drive
Waco, TX 76712, USA
P.O. Box 8117
Waco, TX 76714-8117, USA
Tel: 800 388 4825
Fax: 800 798 4825

Installation Tool Division
1 Corporate Drive
Kingston, NY 12401, USA
Tel: 800 278 4825
Fax: 845 334 7333

AFS Industrial Distribution
Group Headquarters
1925 North MacArthur Drive
Tracy, CA 95376, USA
Tel: 800 826 2884
Fax: 209 839 3022

AFS Industrial Distribution
14300 Clay Terrace Blvd.
Suite 250
Carmel, IN 46032, USA
Tel: 800 826 2884
Fax: 800 573 2645

Latin America Sales
Avenida Parque Lira
79-402 Tacubaya
Mexico C P 11850
Tel: +52 55 5515 1776
Fax: +52 55 5277 7564

Brazil Sales
Av. Nações Unidas, 12.901
Torre Oeste, 3º andar
São Paulo – SP – Brasil
04578-000
Tel: 0800 015 9888
Fax: +55 11 5509 0200

International Locations

India Operations
Unit no. 28, Chowringhee Court
55/1, Chowringhee Road
Kolkata – 700071
India
Tel: +91 33 4069 9170/80
Fax: +91 33 4069 9184

Japan/Korea Sales
Alcoa Japan Ltd.
#1013 NBF Hibiya Bldg.
Uchisaiwai-cho, Chiyoda-ku
Tokyo 100-1011
Japan
Tel: +81 3 3539 6577
Fax: +81 3 3539 6585

Melbourne Operations
1508 Centre Road
Clayton, Victoria, 3168
Australia
Tel: +61 3 8545 3333
Fax: +61 3 8545 3390

Suzhou Sales
58 Yinsheng Road, Shengpu
Suzhou Industrial Park
Suzhou Jiangsu 215126
China
Tel: 0512 62823800-8888
Fax: 0512 62863810

Telford Operations
Unit C, Stafford Park 7
Telford, Shropshire TF3, 3BQ
United Kingdom
Tel: +44 1952 2900 11
Fax: +44 1952 2904 59

Alcoa Fastening Systems
St Cosme Operations
9 rue de Cressonnieres
72110 Saint Cosme en Varais
France
Tel: +33 0 2.43.31.41.00
Fax: +33 0 2.43.31.41.41

Alcoa Fastening Systems
Kelkheim Operations
Industriestr. 6
65779 Kelkheim
Germany
Tel: +49 [0] 6195 8050
Fax: +49 [0] 6195 2001

AFShuck.net

Disclaimer:

The information contained in this publication is only for general guidance, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in AFS's written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.

**Alcoa
Fastening
Systems**

