


**Alcoa
Fastening
Systems**



Hucktainer[®] Fastener System

For Metal-Clad Polymer Core
Composite and Fiberglass
Reinforced Panel Structures.

Weather resistant
Installs in seconds
Corrosion resistant

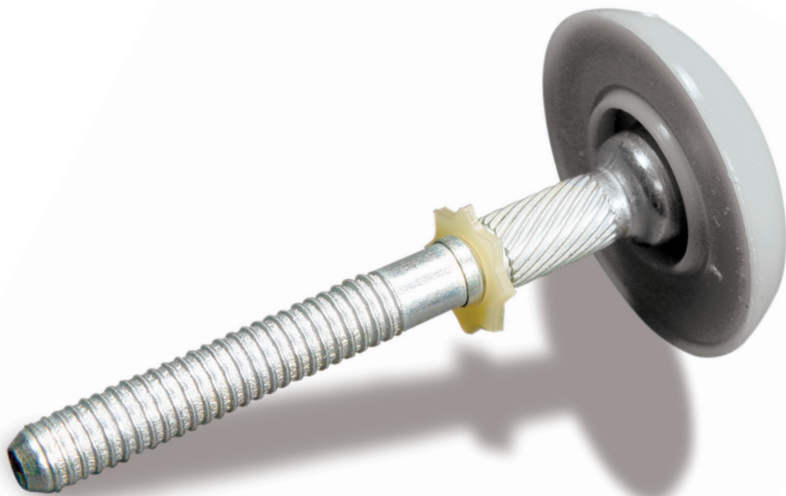

HUCK[®]

Hucktainer®

Bringing Huck® quality to composite panel assemblies for trucks and trailers.

Hucktainer® has earned its reputation as the fastener of choice to provide consistent, controlled clamp, superior vibration resistance and fast, foolproof installation in truck trailers, truck bodies, cargo containers, and other structures fabricated from multi-ply composite panels.

The Hucktainer installs with consistent pressure, reducing the potential for crushing or crazing FRP panels and metal-clad applications. Each Hucktainer features a heavy zinc plating that resists corrosion. For even greater anti-corrosion protection, plastic encapsulation is available. The option of custom colors offers fade-resistant protection, while an integral double seal helps keep the elements and other contaminants from invading the joint.

Requiring only a few seconds to install, Hucktainer fasteners reduce assembly time. Unlike impact wrenches, the tools used to install Hucktainer fasteners are whisper-quiet and come in your choice of air-powered or hydraulic models. Comfortable, ergonomically designed grips combined with easy-to-pull triggers minimize muscle strain and the possibility of repetitive-stress syndrome.


Hucktainer is now also available in shorter lengths called Hucktainer MC, specifically designed to accommodate thinner stack-ups associated with metal-clad panels as thin as 3/16" (.187).




Hucktainer® benefits

- Fast, quiet, foolproof installation
- Installs with consistent pressure, reducing crushing or crazing
- Spiral lock system, breakaway pintail, and smooth bore sleeve
- Heavy zinc plating resists corrosion
- Integral seal keeps contaminants from invading joint / weather-resistant
- Can never be over-torqued or under-torqued
- Tamper-resistant
- Custom coloring for encapsulations available
- Shorter grips available for today's thin metal-clad panels
- RoHS compliant


Installation Sequence




The pin and sleeve are inserted into the prepared hole.

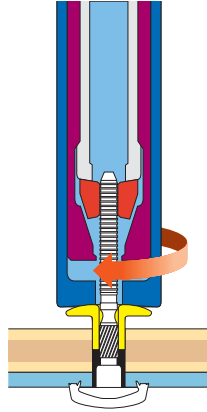

The installation tool is applied to the pintail. When the tool is activated, the sleeve is forced onto the spiral lock of the pin. The rotating action of the nose assembly allows the sleeve to turn freely.

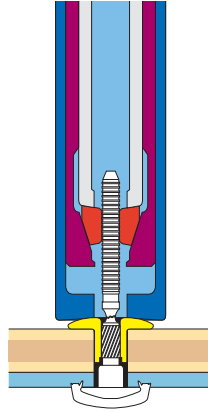


The sleeve is fully engaged on the pin and locks onto the pin's splines to clamp the material tightly together.

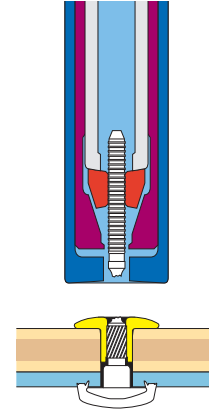

Continued pull of the tool causes the pintail to break away, which completes the installation cycle.

Secure, fast installation

1. Plastic encapsulated head gives maximum corrosion protection.
2. Can be matched to specific fleet colors. UV resistant material is color fast and resists fading.
3. Integral seal resists water intrusion.
4. Grips available to cover application thicknesses from .187" to 1.875"
5. Heavy zinc plating provides additional corrosion protection.
6. Low profile head conserves cargo space.

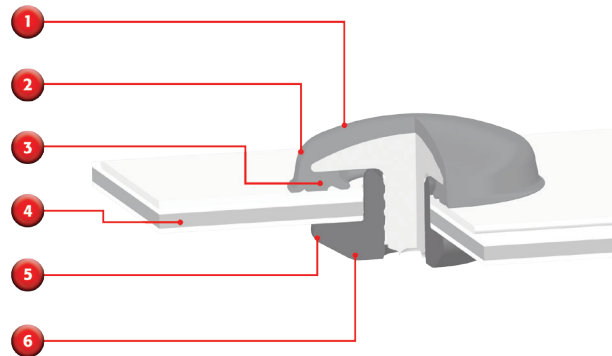

Direct-tension installation


Conventional threaded fasteners may only engage a few threads when joining thin sheets, allowing panels to separate in response to vibration. By contrast, Hucktainer's unique, direct-tension installation process provides for consistent clamp, ensuring accurate tension and a secure, durable connection, time after time.

Hucktainer® MC

Same high performance for today's ultra-thin material.

Hucktainer has been re-engineered to accommodate thinner stack-ups associated with metal-clad (MC) panels in truck and trailer assemblies. Like original Hucktainer, Hucktainer MC utilizes proprietary Huck technology, helping Hucktainer deliver both clamp and vibration resistance, that can't be matched by conventional threaded fasteners.

In addition, Hucktainer MC also features an encapsulated head which forms an integral seal that helps keep the elements and other contaminants from invading the joint, and preserving good looks. If corrosion-resistant fasteners are not used in trailer body assembly, the chance of water damage significantly increases. Over time, this can affect joints and the surrounding metal-clad panels.

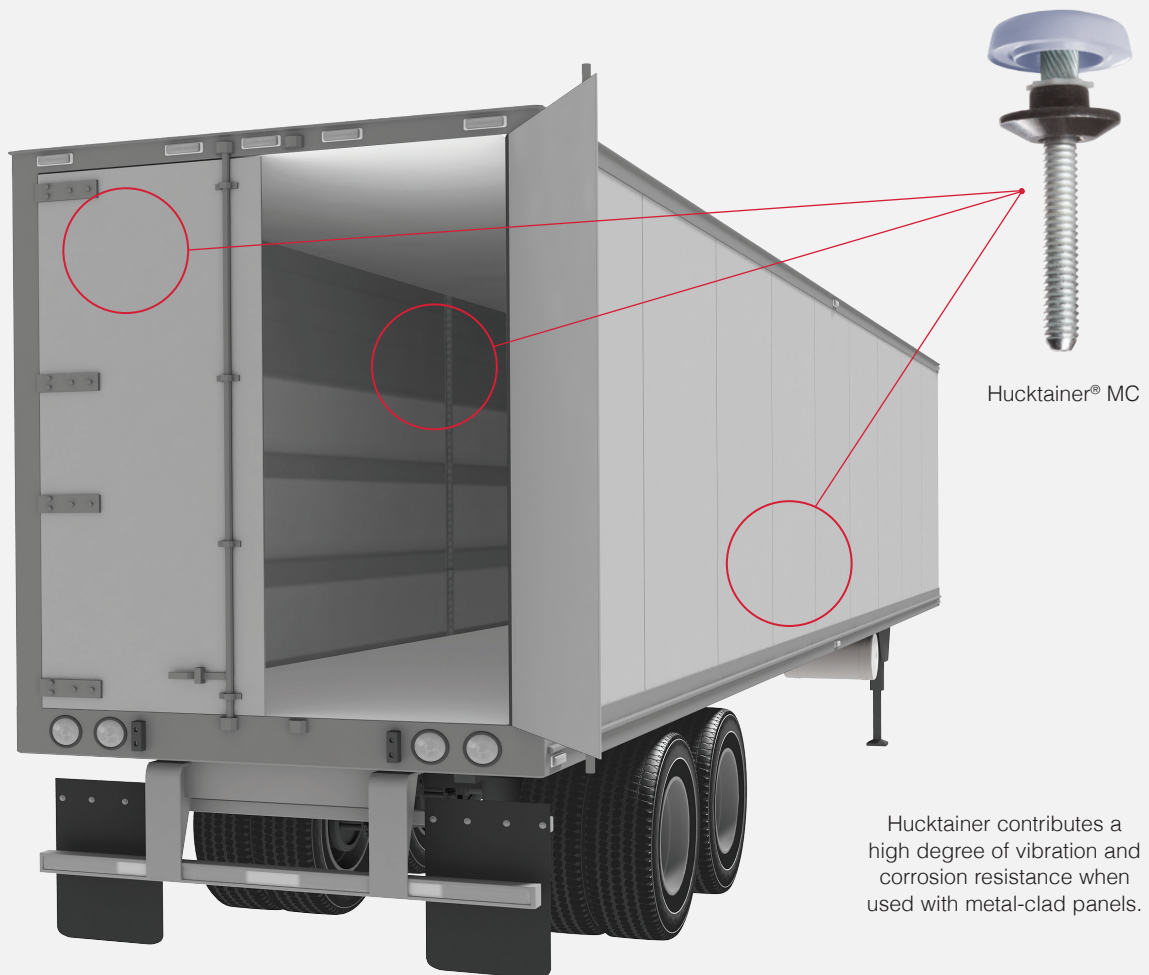

Data and dimensions

Metal Clad HLP

Grip No.	Grip Range		A	B
	Min	Max		
-4 ¹	.187	.312	.338	1.993
-5	.250	.375	.400	2.055
-6	.312	.437	.462	2.118
-7	.375	.500	.525	2.180
-8	.437	.562	.588	2.243
-9 ²	.500	.625	.650	2.305

Standard HLP

Grip No.	Grip Range		A	B
	Min	Max		
-9 ³	.500	.625	.562	2.170
-10	.562	.687	.624	2.232
-11	.625	.750	.687	2.295
-12	.687	.812	.749	2.357
-13	.750	.875	.812	2.420
-14	.812	.937	.874	2.482
-15	.875	1.000	.937	2.545
-16	.937	1.062	.999	2.607
-17	1.000	1.125	1.062	2.670
-18	1.062	1.187	1.124	2.732
-19	1.125	1.250	1.187	2.795
-20	1.187	1.312	1.249	2.857
-21	1.250	1.375	1.312	2.920
-22	1.312	1.437	1.374	2.982
-23	1.375	1.500	1.437	3.045
-24	1.437	1.562	1.499	3.107
-25	1.500	1.625	1.562	3.170
-26	1.562	1.687	1.625	3.232
-27	1.625	1.750	1.687	3.295
-28	1.687	1.812	1.750	3.357
-29 ⁴	1.750	1.875	1.812	3.420

Materials and Finishes

	Material	Finish
Metal-Clad HLP		
Sleeve	Steel	Zinc/Black Chromate
Pin	Steel	Zinc/Clear Chromate
Standard HLP		
Sleeve	Steel	Zinc/Gold Chromate
Pin	Steel	Zinc/Clear Chromate

Tensile (lbf)

Metal-Clad HLP	
Minimum Grip	1600
Mid Grip	1000
Maximum Grip	600
Standard HLP	
Minimum Grip	1800
Mid Grip	1200
Maximum Grip	800

Recommended Hole Size

Hole Diameter	.405-.421
---------------	-----------

NOTE:

Only wide bearing pin HLPSCGE() and/or wide bearing sleeve HLPSCG should be used directly against FRP. Consult factory for stock status; minimums may apply. Available only in encapsulated configuration.


¹ Available encapsulated only.

² For encapsulated - 9 see STD HLP.

³ For unencapsulated see HLPSC.

⁴ Not available encapsulated.
All dimensions are in inches.

Color Pin Locks









All HLP's now come standard with a pin lock, which assists in a semi-one-side installation. That is, it helps to keep the pin in the hole while placing a sleeve over the pintail. It also keeps the pins from falling back through from the shock of their neighboring fasteners being installed.

Now you can get pin locks that are color coded to help identify specific grip lengths of loose fasteners from a distance.


Currently the color coded pin locks are only available on HLPSC products. All standard HLP pins have white pin locks.

HLPSC Pin Lock Colors


	-4
	-5
	-6
	-7
	-8
	All other grip numbers

Recommended Installation Configurations


Metal-Clad



HLMPC-R12-() and
HLPSCS-R12




HLMPC(*)-R12-() and
HLPSCS-R12




HLMPC(*)-R12-() and
HLMCSC-R12


Standard




HLPP-R12-() and
HLPS-R12




HLPP-R12-() and
HLPSC-R12




HLPM()-R12-() and
HLPSM-R12



HLPE()-R12-() and
HLPSC-R12




HLP30-R12-() and
HLPSC-R12




HLP30-R12-() and
HLPSM-R12

Materials Legend



Aluminum, steel, etc.



FRP or other clamp-sensitive material.



Metal-clad or other clamp-sensitive material.

Note: Only wide bearing heads to be used directly against FRP (i.e. HLPS, HLPE(), and HLP30)

Hucktainer Selection Guide

Find a full Selection Guide at AFSHuck.net/Thin

Hucktainer® Installation Tooling

Alcoa Fastening Systems offers air and hydraulic Huck® brand installation tools and nose assemblies to accommodate all fastener types, diameters, and applications. Air tools operate on 90-100 psi air pressure; the lighter weight hydraulic tools operate on pressurized hydraulic fluid supplied by an electrically powered Huck Powerig® unit. Hydraulic hose kits for Powerig units are available in lengths of 12 to 52 feet.

Hucktainer® Installation Tooling

Tool	Nose Assembly	Weight (lbs)	Size (L x W x H)	Stroke (inches)	Pull Force (lbs)	Type
Pneudraulic Tools						
2025	99-3464 99-3464-1	5.75	8.4" x 4.4" x 12.5"	0.675	5290	
255	99-3438	8.8	7.1" x 4.6" x 14.9"	0.625	7750	Concentric
256	99-3438	11.1	7.8" x 6.1" x 14.9"	0.88	9986	Concentric
245	99-3438	8.8		0.625	7750	Eccentric
246	99-3438	11.1		0.88	9986	Eccentric
Hydraulic Tools						
2480	99-3464 99-3464-1	2.2	8.6" x 1.9" x 6.5"	0.875	5700	
2580	99-3438	6.1	8.4" x 2.2" x 6.5"	0.94	10700	

Powerigs®

Model	Flow Rate	Weight (lbs)	Size (L x W x H)	Power
918	2 gpm	708	44" x 25" x 30"	Electrical: 220, 440, 550 volts, 3 phase
940	70 in³/min flow rate	75	12.5" x 10.5" x 18"	Electrical: 115, 220 volts, 1 phase
913H	139 in³/min flow rate	175	24" x 21" x 27"	Gasoline
968	50 in³/min flow rate	93	10.5" x 16.3" x 15.7"	Compressed air, minimum 50 CPM



Model
2025



Model
256



Model
2480

Alcoa Fastening Systems



For more than 120 years, the name Alcoa has been recognized worldwide as a strong leader in product quality and customer support. These strengths are found in every product manufactured for Alcoa Fastening Systems, offering the greatest breadth and depth of fastening system solutions in the industry.

Alcoa Fastening Systems (AFS) maintains company offices in the United States and in many other countries. AFS fastener distributors are also located in many of the world's industrial centers, where they provide a ready source of AFS fasteners, installation tools, tool parts, and application assistance.

Americas

Industrial Fastener Division
8001 Imperial Drive
Waco, TX 76712, USA
P.O. Box 8117
Waco, TX 76714-8117, USA
Tel: 800 388 4825
Fax: 800 798 4825

Installation Tool Division
1 Corporate Drive
Kingston, NY 12401, USA
Tel: 800 278 4825
Fax: 845 334 7333

AFS Industrial Distribution
Group Headquarters
1925 North MacArthur Drive
Tracy, CA 95376, USA
Tel: 800 826 2884
Fax: 209 839 3022

AFS Industrial Distribution
14300 Clay Terrace Blvd.
Suite 250
Carmel, IN 46032, USA
Tel: 800 826 2884
Fax: 800 573 2645

Latin America Sales
Avenida Parque Lira
79-402 Tacubaya
Mexico C P 11850
Tel: +52 55 5515 1776
Fax: +52 55 5277 7564

Brazil Sales
Av. Nações Unidas, 12.901
Torre Oeste, 3º andar
São Paulo – SP – Brasil
04578-000
Tel: 0800 015 9888
Fax: +55 11 5509 0200

International Locations

India Operations
Unit no. 28, Chowringhee Court
55/1, Chowringhee Road
Kolkata – 700071
India
Tel: +91 33 4069 9170/80
Fax: +91 33 4069 9184

Japan/Korea Sales
Alcoa Japan Ltd.
#1013 NBF Hibiya Bldg.
Uchisaiwai-cho, Chiyoda-ku
Tokyo 100-1011
Japan
Tel: +81 3 3539 6577
Fax: +81 3 3539 6585

Melbourne Operations
1508 Centre Road
Clayton, Victoria, 3168
Australia
Tel: +61 3 8545 3333
Fax: +61 3 8545 3390

Suzhou Sales
58 Yinsheng Road, Shengpu
Suzhou Industrial Park
Suzhou Jiangsu 215126
China
Tel: 0512 62823800-8888
Fax: 0512 62863810

Telford Operations
Unit C, Stafford Park 7
Telford, Shropshire TF3, 3BQ
United Kingdom
Tel: +44 1952 2900 11
Fax: +44 1952 2904 59

Alcoa Fastening Systems
St Cosme Operations
9 rue de Cressonnières
72110 Saint Cosme en Varais
France
Tel: +33 0 2.43.31.41.00
Fax: +33 0 2.43.31.41.41

Alcoa Fastening Systems
Kelkheim Operations
Industriestr. 6
65779 Kelkheim
Germany
Tel: +49 [0] 6195 8050
Fax: +49 [0] 6195 2001

AFSHuck.net
YouTube.com/AFSIndustrial

**Alcoa
Fastening
Systems**



The information contained in this publication is only for general guidance, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in AFS's written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.

